



PRODUCT DATA SHEET

www.btm.co


Bituminous Waterproofing Membranes Co.
Kemalpaşa Org. San. Bölgesi, Atatürk Mah. Gazi
Bulvarı. No: 152 Kemalpaşa / İZMİR /TURKEY
Tel:+90 0232 877 04 02 (8 line)
Fax: +90 0232 877 04 10

CORRUBIT RIDGE

Document number :PDS-109-0

Publication Date :01th,Jan.2011 Revision date : -

PRODUCT DESCRIPTION	Ridge			
USAGE	Used in the joints of pitched roofs covered with corrugated bitümen sheets			
APPLICATION METHOD	Mechanically fixed by special nails. Please refer to application booklet.			
STORAGE	Keep the bundles from direct sunlight			
ECOLOGICAL DATA	Used in many climatic conditions.			
TEST	METHOD	UNIT	TOLERANCE	VALUES
Length (A)	TS EN 534	mm	+%1 , -%0	1000
				2000
Width (B)	TS EN 534	mm	±%2	450
Thickness	TS EN 534	mm	±%10	2,4
Height of Corrugations (C)	TS EN 534	mm	±%6	50
Homogeneity of product	TS EN 534	-	-	PASS

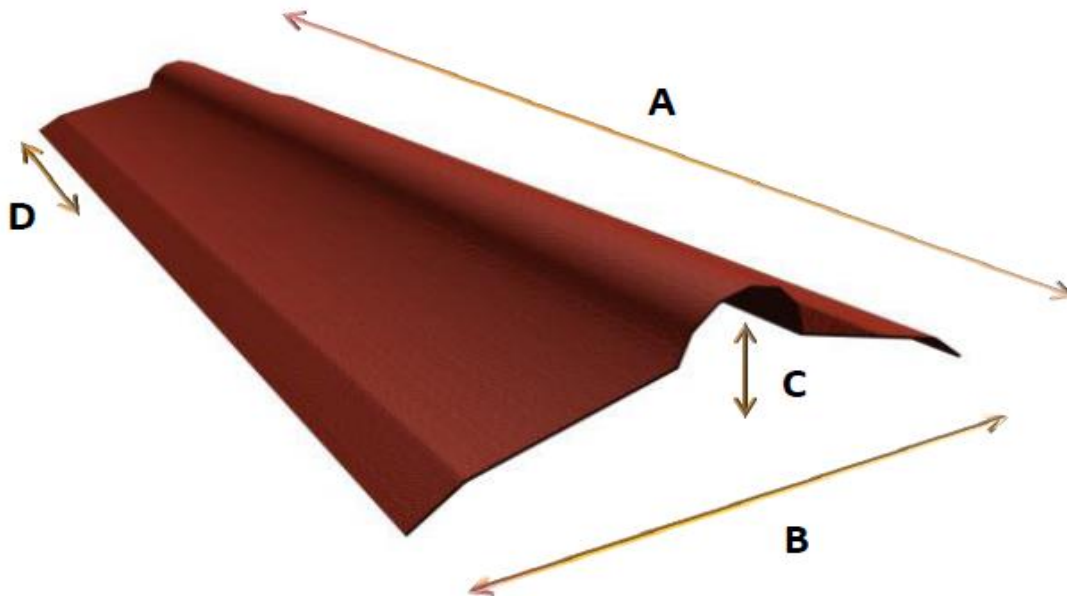

NPD = (No performance defined)

* For information and advice on the safe handling, storage and disposal of chemical products, users shall refer to the most recent Material Safety Data Sheet

The manufacturer serves the right to modify, at any time, the characteristics of its products

BF/14-17-0